


NOMAFLEX®

Polypropylene Joint Filler
Plank and Sheet

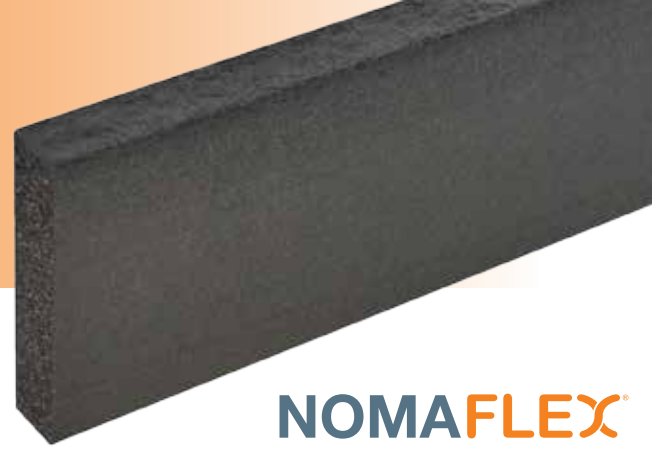

NOMAFLEX®

Nomaflex® is a performance engineered foam that sets a new standard for the protection of concrete expansion and contraction joints. It is a closed cell extruded polypropylene foam that performs better, installs faster, and adds more value to the installed job.

PERFORMANCE

Nomaflex is a closed cell polypropylene foam that can be used in residential, commercial, civil, municipal and industrial applications. It will not absorb water and extends the service life of concrete by acting as an insulator to contraction and expansion joints. Nomaflex does not impede sealant cure time and can be used without a bond breaker.

Nomaflex resists oils, gas, salts, acetone and other chemicals. It does not leach like other products and is not sticky. Nomaflex complies with ASTM D 8139, ASTM D 545 and D 1751 test methods for extrusion, compression recovery and water absorption.

INSTALLATION

Nomaflex is a flexible yet semi-rigid foam that can be passed across wet pours without breaking. It transports easily and is light enough that one person can easily carry multiple bundles.

Nomaflex can be used with all hot-pour or cold-applied sealants and prevents 3-sided sealant adhesion. The Nomaflex Cutter is a tool that creates a 1/2" tear-off strip that once removed, creates a void for sealants. The tear-off strip remains attached until the installer removes it. Nomaflex is also compatible with plastic edge caps and should be installed 1/2" below the concrete surface prior to pouring concrete. Nomaflex can be used as a form and should be installed against any edge where concrete is poured and an expansion joint is required. Spray adhesives can also be used with Nomaflex.

VALUE

Nomaflex is waterproof and can be stored outside. It will not break or flake due to weather elements. Nomaflex lasts longer and is 100% recyclable. Installers have the added benefit of a lower installed cost when using Nomaflex.

2017 WINNER



Features

- Natural bond breaker
- Ultra lightweight
- Flexible, bends to 12" diameter
- Moisture resistant
- Can be stored outside
- Traditional methods used for installation
- Can be used with hot-pour and cold-applied sealants
- Clean product
- Inert
- Recyclable
- Reusable
- Made in USA

PHYSICAL PROPERTIES

Property	Value	ASTM Test Methods
Water Absorption	<1%	D 8139, D 545, D 1751
Compression Strength	>30 psi and <60 psi	D 8139, D 545, D 1751, D 1752
Compression Recovery	>80%	D 8139, D 545, D 1751, D 1752
Freeze Thaw Resistance	No Change	D 8139, C 666 (300 cycles)
Heat Resistance	392°F +/- 5°F	D 8139, D 5249
UV Weathering	No Change	D 8139, D 4329 (1000 hrs. Cycle A)
Extrusion	<0.1 in.	D 8139, D 545, D 1751, D 1752
Density	>3.5 lbs./cu.ft.	D 8139, D 545, D 1751, D 1752
Boiling in Hydrochloric Acid	No disintegration	D 545, D 1752
Expansion in Boiling Water	<1% expansion	D 545, D 1752
100% Recyclable	N/A	N/A
R-Value	3.5	C 518

PRODUCT INFORMATION

Product	Linear Ft/ Unit	Feet per Pack	# of 10 Packs per Skid	Linear Ft / Pallet	
				5'	10'
1/2" Plank - Bundles of 10					
1/2" x 2"	5' / 10'	50 / 100	192	9,600	19,200
1/2" x 3"	5' / 10'	50 / 100	128	6,400	12,800
1/2" x 3-1/2"	5' / 10'	50 / 100	104	5,200	10,400
1/2" x 4"	5' / 10'	50 / 100	96	4,800	9,600
1/2" x 5"	5' / 10'	50 / 100	72	3,600	7,200
1/2" x 6"	5' / 10'	50 / 100	64	3,200	6,400
1/2" x 7"	5' / 10'	50 / 100	48	2,400	4,800
1/2" x 8"	5' / 10'	50 / 100	48	2,400	4,800
3/4" Plank - Bundles of 10					
3/4" x 3-1/2"	5' / 10'	50 / 100	78	3,900	7,800
3/4" x 4"	5' / 10'	50 / 100	72	3,600	7,200
3/4" x 5"	5' / 10'	50 / 100	54	2,700	5,400
3/4" x 6"	5' / 10'	50 / 100	48	2,400	4,800
3/4" x 8"	5' / 10'	50 / 100	36	1,800	3,600

Product	Linear Ft/ Unit	Feet per Pack	# of 10 Packs per Skid	Linear Ft / Pallet	
				5'	10'
1" Plank - Bundles of 10					
1" x 3-1/2"	5' / 10'	50 / 100	52	2,600	5,200
1" x 4"	5' / 10'	50 / 100	48	2,400	4,800
1" x 5"	5' / 10'	50 / 100	36	1,800	3,600
1" x 6"	5' / 10'	50 / 100	32	1,600	3,200
1" x 8"	5' / 10'	50 / 100	24	1,200	2,400

Product	Linear Ft/ Unit	Sheets per Pallet	# of 10 Packs per Skid	Linear Ft /
				Pallet
Sheet				
1/2 x 48"	10'	80	52	800
3/4 x 48"	10'	60	48	600
1" x 48"	10'	40	36	400
1" x 48"	5'	40	32	400